

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 February 2003 (06.02.2003)


PCT

(10) International Publication Number  
WO 03/010912 A3

- (51) International Patent Classification: G01S 5/02, H04B 7/185
- (21) International Application Number: PCT/US02/33282
- (22) International Filing Date: 22 July 2002 (22.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Date: 09/015,219 25 July 2001 (25.07.2001) US
- (71) Applicant: GLOBAL LOCATE, INC./US/US; 3190 S. Bascom, Suite 260, San Jose, CA 95124 (US).
- (72) Inventors: VAN DIOGELEN, Frank; 1005 Alamitos Creek Drive, San Jose, CA 95120 (US). ABRAHAM, Charles; 3803 Newgate Court, San Jose, CA 95138 (US). LAMANCE, James, W.; 314 Brian Court, San Jose, CA 95123 (US).
- (54) Agent: MOSER, Raymond, R., Jr.; c/o PAGNOTTA, Joseph, TONG, Kin-Wah, Moser Paterson & Sheridan LLP, 595 Shrewsbury Avenue, Suite 100, Shrewsbury, NJ 07702 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR GENERATING AND DISTRIBUTING SATELLITE TRACKING INFORMATION IN A COMPACT FORMAT

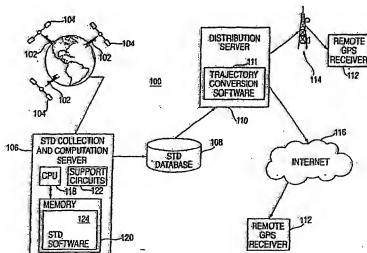

(57) Abstract: A method and apparatus (100) for creating and distributing satellite tracking data in a compact format to a remote receiver (112). At least a portion of the satellite tracking data is extracted from memory (120) and is formatted into a compact format (111). The compact formatted data (111) is transmitted to the remote receiver (112) via a distribution network (114, 116). Once this data is received at the remote receiver (112) it is reformatted into a format prescribed by the remote receiver (112).

WO 03/010912 A3



GL\_602 045453

WO 03/010912 A3



(88) Date of publication of the international search report:  
14 August 2003

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/23282

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01S 5/02; H04B 7/185

US CL : 342/357.09, 357.02, 357.06, 357.1, 357.12, 358

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 342/357.09, 357.02, 357.06, 357.1, 357.12, 358; 701/207, 213, 214, 215; 455/456, 457, 561, 575

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Confirmation Sheet

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,118,977 A (VANNUCCI) 12 September 2000 (12.09.2000), column 2, line 65 - column 3, line 5; column 4, lines 35-40, line 61 - column 5, line 4; column 6, line 66 - column 7, line 5.	1-5, 9-15, 27, 30-32, 34
A	US 5,812,087 A (KRASNER) 22 September 1998 (22.09.1998), entire document.	1-34
A	US 6,064,336 A (KRASNER) 16 May 2000 (16.05.2000), entire document.	1-34
A	US 6,067,045 A (CASTELLOE et al.) 23 May 2000 (23.05.2000), entire document.	1-34
A	US 6,211,819 B1 (KING et al.) 03 April 2001 (03.04.2001), entire document.	1-34
A	US 6,215,441 B1 (MOEGLEIN et al.) 10 April 2001 (10.04.2001), entire document.	1-34
A, P	US 6,313,787 B1 (KING et al.) 06 November 2001 (06.11.2001), entire document.	1-34
A, E	US 6,437,735 B1 (MCMAHAN) 20 August 2002 (20.08.2002), entire document.	1-34

☐ Further documents are listed in the confirmation of Box C.☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claim(s)

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principles or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search

22 October 2002 (22.10.2002)

Date of mailing of the international search report

29 MAY 2003

Name and mailing address of the ISA/US

Committee of Patents and Trademarks

Post PCT

Washington, D.C. 20531

Facsimile No. (703) 305-3230

Authorized officer

Eric M Gibson

Telephone No. (703) 308-1113

Form PCT/ISA/210 (second sheet) (July 1998)

GL\_602 045455

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/23282

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claim Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claim Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

FCT/US02/23282

Continuation of B. FIELDS SEARCHED Item 3:

BRS

search terms: ephemerides or ephemeris, satellite tracking data, ICD-GPS-200, transmitS or broadcast, assisted GPS, GPS almanac,

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
6 February 2003 (06.02.2003)


PCT

(10) International Publication Number  
WO 03/010912 A2

- (51) International Patent Classification: H04L
- (21) International Application Number: PCT/US02/23282
- (22) International Filing Date: 22 July 2002 (22.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/915,219 25 July 2001 (25.07.2001) US
- (71) Applicant: GLOBAL LOCATE, INC [US/US]; 3190 S. Bascom, Suite 260, San Jose, CA 95124 (US).
- (72) Inventors: VAN DIGGELEN, Frank; 1005 Alamitos Creek Drive, San Jose, CA 95130 (US). ABRAHAM, Charles; 5803 Newgate Court, San Jose, CA 95138 (US). LAMANCE, James, W.; 314 Brian Court, San Jose, CA 95123 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR GENERATING AND DISTRIBUTING SATELLITE TRACKING INFORMATION IN A COMPACT FORMAT

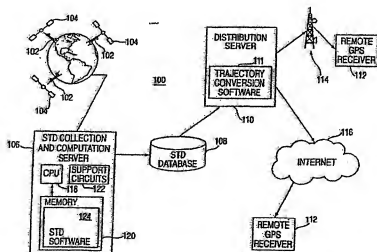

(57) Abstract: A method and apparatus for creating and distributing satellite tracking data in a compact format to a remote receiver. At least a portion of the satellite tracking data is extracted from memory and is formatted into a compact format. The compact formatted data is transmitted to the remote receiver via a distribution network. Once this data is received at the remote receiver it is reformatted into a format prescribed by the remote receiver.

WO 03/010912 A2

WO 03/010912 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## METHOD AND APPARATUS FOR GENERATING AND DISTRIBUTING SATELLITE TRACKING INFORMATION IN A COMPACT FORMAT

### BACKGROUND OF THE INVENTION

#### Field of the Invention

{0001} The present invention generally relates to generating satellite tracking information for earth orbiting satellites. More specifically, the invention relates to a method and apparatus for generating and distributing satellite tracking information in a first format (e.g., a compact ephemeris model) through a network or communications link, then representing the satellite tracking information in a second format (e.g., a standard ephemeris model) at a receiver.

#### Description of the Related Art

{0002} A positioning receiver for the Global Positioning System (GPS) uses measurements from several satellites to compute a position. The process of acquiring the GPS radio signal is enhanced in speed and sensitivity if the GPS receiver has prior access to a model of the satellite orbit and clock. This model is broadcast by the GPS satellites and is known as ephemeris or ephemeris information. Each satellite broadcasts its own ephemeris once every 30 seconds. Once the GPS radio signal has been acquired, the process of computing position requires the use of the ephemeris information.

{0003} The broadcast ephemeris information is encoded in a 900 bit message within the GPS satellite signal. It is transmitted at a rate of 50 bits per second, taking 18 seconds in all for a complete ephemeris transmission. The broadcast ephemeris information is typically valid for 2 to 4 hours into the future (from the time of broadcast). Before the end of the period of validity the GPS receiver must obtain a fresh broadcast ephemeris to continue operating correctly and produce an accurate position. It is always slow (no faster than 18 seconds), frequently difficult, and sometimes impossible (in environments with very low signal strengths), for a GPS receiver to download an ephemeris from a satellite. For these reasons it has long been known that it is advantageous to send the ephemeris to a GPS receiver by some other means



in lieu of awaiting the transmission from the satellite. US Patent 4,445,118, issued April 24, 1984, describes a technique that collects satellite orbit information at a GPS reference station, and transmits the information to the remote GPS receiver via a wireless transmission. This technique of providing the ephemeris, or equivalent data, to a GPS receiver has become known as "Assisted-GPS". Since the source of ephemeris in Assisted-GPS is the satellite signal, the ephemeris information remains valid for only a few hours. As such, the remote GPS receiver must periodically connect to a source of ephemeris information whether that information is received directly from the satellite or from a wireless transmission. Without such a periodic update, the remote GPS receiver will not accurately determine position.

[0004] Furthermore, the Assisted-GPS systems typically retransmit the entire ephemeris message to the remote receiver. In many instances, bandwidth or packet size for the transmission of this message is not readily available.

[0005] Therefore, there is a need for a method and apparatus for providing satellite trajectory and clock information to a remote receiver in a compact form.

#### SUMMARY OF THE INVENTION

[0006] The present invention is a method and apparatus for generating satellite tracking data (STD), then transmitting the data to a remote receiver in a compact form. The STD is derived by receiving at one or more satellite tracking stations the signals from at least one satellite and determining satellite tracking information (STI) through signal processing or by extracting the ephemeris message from the received signals. STI contains present satellite orbit trajectory data and satellite clock information.

[0007] The STD is reformatted into a compact format and provided to a remote satellite signal receiver via a network or communications system. The receiver converts the compact format into a standard format and uses the STD to compute the position of the receiver. The satellite system may include the global positioning system (GPS), GLONASS, GALILEO, or other satellite systems that may use STD to enhance the performance of the receiver.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0008] So that the manner in which the above recited features of the present

invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiments thereof which are illustrated in the appended drawings.

[0009] It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

[0010] Figure 1 depicts a system for creating and distributing satellite tracking data (STD) to remote GPS receivers;

[0011] Figure 2 depicts a flow diagram of a method for forming the STD from the satellite measurements made at satellite tracking stations;

[0012] Figure 3 depicts a flow diagram of a method for forming a compact orbit model in accordance with the present invention; and

[0013] Figure 4 depicts an example of compacting the orbit model, where two orbit model terms are compacted into a single term.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0014] Figure 1 depicts a block diagram of a system 100 for creating and distributing satellite tracking data (STD). The satellite system may include the global positioning system (GPS), GLONASS, GALILEO, or other satellite systems that may use STD to enhance the performance of the receiver. The following disclosure uses GPS as an illustrative system within which the invention operates. From the following disclosure, those skilled in the art will be able to practice the invention in conjunction with other satellite based positioning systems.

[0015] A network of GPS tracking stations 102 is used to collect measurement data from the GPS satellites 104. Such a network is described in detail in US patent application serial number 09/615,105, filed July 13, 2000 and incorporated herein by reference. The network could comprise several tracking stations that collect satellite tracking information (STI) from all the satellites in the constellation, or a few tracking stations, or a single tracking station that only collects STI for a particular region of the world. An STD collection and computation server 106 collects and processes the

measurement data (this measurement data is referred to herein as satellite tracking information (STI) that includes at least one of: code phase measurements, carrier phase measurements, Doppler measurements, or ephemeris data). The ephemeris data may be the decoded ephemeris message extracted from the GPS signal itself.

[0016] The server may create long term STD in accordance with the teachings of U.S. patent application serial number 09/875,809, filed June 6, 2001, (attorney docket GBL/016) or standard ephemeris message data in accordance with the teachings of U.S. patent number 5,365,450, issued November 15, 1994, both of which are incorporated herein by reference. The server 106 may produce one or more of the following: 1) accurate satellite tracking data (STD) (e.g., a trajectory of each satellite and/or a clock offset measurement) during the data collection period, 2) a prediction of the future STD of each satellite, and 3) models that match the future STD of each satellite.

[0017] The server 106 comprises a central processing unit (CPU) 118, support circuits 122, and memory 120. The CPU 118 may be any one of the many CPUs available on the market to perform general computing. Alternatively, the CPU may be a specific purpose processor such as an application specific integrated circuit (ASIC) that is designed to process satellite tracking information. The support circuits 122 are well known circuits such as clock circuits, cache, power supplies and the like. The memory 120 may be read only memory, random access memory, disk drive storage, removable storage or any combination thereof. The memory 120 stores executable software, e.g., STD software 124, that, when executed by the CPU 118, causes the system 100 to operate in accordance with the present invention.

[0018] The set of satellite trajectory and clock data produced by the STD software 124. The STD is stored in an STD database 108. A distribution server 110 accesses the database 108 to gather the most recent set of STD, formats the data using the formatting software 111, and distributes the formatted data to GPS devices 112 that require satellite orbit information. The software 111 produces a compact format, e.g., a compact ephemeris model, in accordance with the present invention.

[0019] The distribution process may be implemented using some form of wireless communications system 114, or over the Internet 116, or a combination of both, or by

some other means of communication. Once the GPS devices 112 have received the compact ephemeris model, they expand the model to a format that is conventional for receiver. The compact ephemeris model distributed to the GPS devices may be in a similar format as the broadcast ephemeris or may be some other model format that is defined by the GPS device. Herein this orbit data is generally referred to as a satellite tracking model (STM). The loading of the STM into the GPS receiver can be accomplished in many ways. Using the cradle for a personal digital assistant (PDA), direct connection to a network, or a wireless technology, such as Bluetooth or a cellular network, are a few examples of how the satellite data can be transferred to the receiver. The transmission is generally accomplished by broadcasting a compact model of the STD (or a compact model representing a portion of the STD) without knowledge of the specific location of the GPS receiver. As such, the distribution server does not require the GPS receiver to send any information through the network to the distribution server.

[0020] Since GPS is a ranging system in and of itself, the data transmitted by the GPS satellites can be used to determine the range, range-rate and clock offsets to the GPS satellites from a set of tracking stations. This set of observations generated by the tracking stations 102 is used in the orbit determination process, and in the estimation of the satellite clock characteristics. The set of monitoring stations 102 could be a single station, a public network such as the Continuously Operating Reference System (CORS), or a privately owned and/or operated network.

[0021] FIG. 2 depicts a flow diagram of the process 200 of the present invention. The process 200 begins at step 202, wherein the satellite measurements are collected at the tracking stations. At step 204, the satellite trajectory data (STD) is computed or extracted from the satellite signals. The STD is then stored at step 206 in the STD database. At step 208, the database is accessed and the formatting software is executed to convert the formatting of the accessed STD. The formatted STD is output as the compact model at step 210.

[0022] One embodiment of the invention formats the STD as a subset of the standard ephemeris parameters defined in ICD-GPS-200c. Fitting the STD to the desired compact orbit model can be accomplished in a number of mathematical methods. The preferred embodiment is a least-squares fit of the orbit model

parameters to the trajectory data. Other methods, such as Kalman filters or other estimators can also be used to obtain the orbit model parameters that best fit the trajectory data. These techniques of fitting data to orbit models are well known to people skilled in the art of orbit determination and orbit modeling.

[0023] The least squares technique provides an optimal fit of the trajectory data to the model trajectory formed from the compact orbit model parameters. Figure 3 depicts a flow diagram of a method of generating an orbit model using a least squares estimation technique.

[0024] At step 302, the STD for the desired time interval is extracted from the STD database. The orbit model parameters are initialized to the orbit model values obtained by a similar process for the previous interval. This guarantees that the initial orbit model parameters are a good fit at least for the beginning of the desired time interval. The rest of the process 300 will ensure that the parameters are adjusted so that they become a good fit for the entire time interval.

[0025] In the preferred embodiment there are 15 orbital parameters to be adjusted:

- Square root of semi-major axis (meters<sup>1/2</sup>)
- Eccentricity (dimensionless)
- Amplitude of sine harmonic correction term to the orbit radius (meters)
- Amplitude of cosine harmonic correction term to the orbit radius (meters)
- Mean motion difference from computed value (radians/sec)
- Mean anomaly at reference time (radians)
- Amplitude of cosine harmonic correction term to the argument of latitude (radians)
- Amplitude of sine harmonic correction term to the argument of latitude (radians)
- Amplitude of cosine harmonic correction term to the angle of inclination (radians)
- Amplitude of sine harmonic correction term to the angle of inclination (radians)
- Longitude of ascending node of orbit plane at weekly epoch (radians)
- Inclination angle at reference time (radians)

- Rate of inclination angle (radians/sec)
- Argument of perigee (radians)
- Rate of right ascension (radians/sec)

[0027] At step 303, some of the terms in the 15 term set are set to zero. The terms that are selected are the 6 harmonic terms such that there are 9 remaining parameters. This approach is particularly useful when bandwidth and/or packet size is limited in the communication link that will be used to convey the orbit model to the satellite signal receiver, e.g., the remote GPS receiver. The subset of 9 parameters, by setting all harmonic terms in the model to zero, is:

- Square root of semi-major axis (meters<sup>1/2</sup>)
- Eccentricity (dimensionless)
- Mean motion difference from computed value (radians/sec)
- Mean anomaly at reference time (radians)
- Longitude of ascending node of orbit plane at weekly epoch (radians)
- Inclination angle at reference time (radians)
- Rate of inclination angle (radians/sec)
- Argument of perigee (radians)
- Rate of right ascension (radians/sec)

[0028] The receiver can then reconstruct a standard ephemeris model by setting the "missing" harmonic terms to zero. In essence, the receiver reformats the STD for processing by the receiver circuits.

[0029] As an example of the method of generating the compact model, consider Figure 4, which shows, for simplicity, just two terms of an orbit 400: an orbital radius (A), and a radial harmonic term (r). For this simple example, these two terms form the non-compact model, wherein the orbit is described by a circle of radius (A) plus a harmonic perturbation (r). To produce a more compact model that fits the actual orbit over an interval 402, the method of the invention removes the harmonic term (i.e., sets the term (r) to zero) and increases the orbital radius (A) to a larger value (A<sub>1</sub>). The compact model is an orbit described by a circle with radius A<sub>1</sub>. If an application requires a non-compact orbit model, then the compact model (A<sub>1</sub>) can be represented as a non-compact model by specifying a harmonic term (r<sub>1</sub>) equal to zero. This compact model

will fit the original orbit, over an interval 402, with a small error.

[0030] In the preferred embodiment, 6 harmonic terms are removed from the 15-parameter model, and the other 9 terms are adjusted by process 300 that is analogous to the example 400 to provide a compact model that is accurate over a pre-defined interval. By adjusting the 9 remaining terms of an orbit model, while "zeroing" 6 harmonic terms, the compact model can be made accurate over a period of time such that a GPS receiver that relies on a compact model to compute position would compute a location that is no more than 2 meters less accurate than if the receiver used a full orbit model to compute position.

[0031] There are many alternative embodiments that will be readily apparent to those skilled in the art, such as removing more or fewer terms before adjusting the remaining terms, setting removed terms to some value other than zero, and defining new terms that model the orbit.

[0032] Returning to FIG. 3, at step 304, the orbit model is used to predict what the trajectory would be, the predicted data is denoted the "Model Trajectory Data" (MTD). If the model were perfect, the MTD would coincide exactly with the STD. At step 306, the MTD and STD are compared to see how closely the orbit model fits the orbit data. In the preferred embodiment, the comparison step 306 is performed by summing the squares of the differences between each trajectory point in the STD and the corresponding point in the MTD, and comparing the resulting sum to a threshold. If the fit is "good", the model parameters are deemed "good" and the process stops at step 310. If the fit is not good then the model parameters are adjusted at step 308. There are many techniques well known in the art for adjusting model parameters to fit data. Steps 304, 306 and 308 are repeated until the model parameters are found that fit the STD well.

[0033] There are a large number of alternative embodiments to reduce the size of the data, i.e., compacting the STD, while still providing a model that fits the STD, including:

- Removing parameters from the model, and replacing them with a constant, such as zero—as done above—or some other predetermined value, which is either stored in the Remote GPS Receiver, or occasionally

sent to the receiver. The predetermined value may be determined by a GPS almanac stored at both the receiver, and the distribution server.

- The resolution of the parameters may be restricted in the process, 300, this too reduces the amount of data that must be sent to the mobile GPS receiver.
- Parameters, which are similar among two or more satellites, may be represented as a master value plus a delta, where the delta requires fewer bits to encode; an example of this is the parameter Eccentricity, which changes very little among different GPS satellites.

[0034] Some of these approaches reduce the ability of the model to fit the data over a period of time (e.g., four hours). In this case, the fit interval may be reduced (e.g. to two hours) to compensate. The accuracy of fit of the model can be traded off against the period of time over which the model is valid. While the foregoing is directed to the preferred embodiment of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.



## Claims:

1. A method of creating and distributing compact satellite orbit models comprising:  
receiving satellite signals from at least one satellite and at least one receiving station;  
extracting at least a portion of the satellite tracking data from said satellite signal, representing said data in a first format;  
transmitting the formatted data to a remote receiver; and  
at the remote receiver, representing said formatted data in a second format supported by the remote receiver.
2. The method of claim 1 wherein said satellite tracking data comprises at least one of a satellite orbit model or a satellite clock model.
3. The method of claim 1 wherein said satellite tracking data comprises at least one of: data representative of a satellite orbit model, orbit model, data representative of a satellite clock model.
4. The method of claim 1 wherein said second format is a format that is prescribed by said remote receiver.
5. The method of claim 1 wherein said second format comprises parameters defined in ICD-GPS-200.
6. The method of claim 1 wherein said first format comprises a first set of terms that define a first form of orbit model, and said second format comprises a second set of terms that define a second form of orbit model, and said second set of terms is larger than said first set of terms.
7. The method of claim 1 wherein said first format comprises a first set of terms that define a first form of orbit model, and said second format comprises a second set of terms that define a second form of orbit model, where said second set of terms contains said first set of terms.

8. The method of claim 1 wherein said first format comprises a first set of terms that define a first form of orbit model and said second format comprises a second set of terms that define a second form of orbit model, and at least one term of said first set is defined as a number with lower resolution than the corresponding term in second set.
9. The method of claim 1 where said data in a first format requires fewer bits to encode it than said data in a second format.
10. The method of claim 1 wherein said remote receiver is a GPS receiver.
11. The method of claim 1 wherein said remote receiver is a satellite positioning system receiver.
12. The method of claim 1 wherein said second format is a standard format for providing satellite models to a global positioning system receiver.
13. The method of claim 1 wherein said transmitting is performed using a wireless communications link.
14. The method of claim 13 wherein said transmitting is done without requiring from said remote receiver data representative of said remote receiver's position.
15. The method of claim 1 where an accuracy of the data in said first format is increased by decreasing a time interval represented by said formatted data.
16. A method of creating and distributing a compact orbit model comprising:
  - receiving satellite signals from at least one receiving station;
  - extracting at least a portion of the satellite tracking data from the satellite signal, where said portion comprises a first number of orbit terms that define a first orbit model;
  - formatting said portion to form formatted data having a second number of orbit terms that define a second orbit model, where said first number is greater than said

second number;

transmitting the formatted data to a remote receiver; and  
at the remote receiver, expanding the formatted data to have the first number of terms.

17. The method of claim 16 wherein said satellite tracking data comprises at least one of a satellite orbit model or a satellite clock model.

18. The method of claim 16 wherein said satellite tracking data comprises at least one of: data representative of a satellite orbit model, orbit model, data representative of a satellite clock model.

19. The method of claim 16 wherein said second orbit model is a compact orbit model.

20. The method of claim 16 wherein said expanding step results in a data format that is prescribed by said remote receiver.

22. The method of claim 20 wherein the data format having the first number of terms comprises parameters defined in ICD-GPS-200.

23. The method of claim 16 where said terms in said second orbit model require fewer bits to encode it than said terms in a first orbit model.

24. The method of claim 16 wherein said remote receiver is a GPS receiver.

25. The method of claim 16 wherein said remote receiver is a satellite positioning system receiver.

26. The method of claim 16 where an accuracy of the data in said second orbit model is increased by decreasing a time interval represented by said formatted data defining said second orbit model.

27. A method of creating a compact orbit model comprising:

providing a satellite orbit model having a first set of terms;  
adjusting the first set of terms to produce a compact orbit model having a second set of terms, where a number of terms in the first set of terms is greater than a number of terms in said second set of terms.

28. The method of claim 27 wherein said adjusting step further comprises:  
zeroing a plurality of terms in said first set of terms.

29. The method of claim 28 wherein said adjusting step further comprises:  
adjusting a plurality of non-zero terms in the second set of terms in response to the effects of zeroing terms in the first set of terms.

30. Apparatus for creating and distributing compact satellite orbit models comprising:  
at least one satellite signal receiver for receiving satellite signals from at least one satellite;  
means for extracting at least a portion of the satellite tracking data from said satellite signal, representing said data in a first format;  
a transmitter for transmitting the formatted data to a remote receiver; and  
at the remote receiver, representing said formatted data in a second format supported by the remote receiver.

31. The apparatus of claim 30 wherein said second format is a format that is prescribed by said remote receiver.

32. The apparatus of claim 30 wherein said second format comprises parameters defined in ICD-GPS-200.

33. The apparatus of claim 30 wherein said first format comprises a first set of terms that define a first form of orbit model, and said second format comprises a second set of terms that define a second form of orbit model, and said second set of terms is larger than said first set of terms.

34. The apparatus of claim 30 wherein said transmitter is a wireless.

1/4

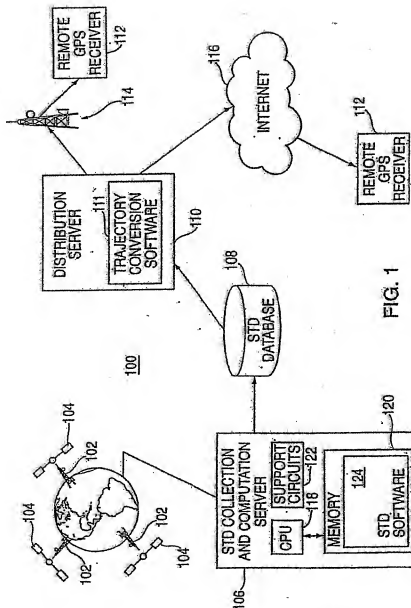


FIG. 1

2/4

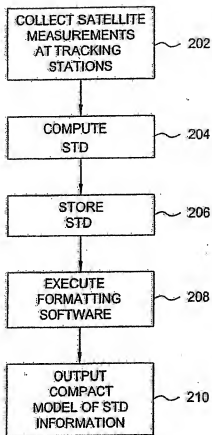
200

FIG. 2

3/4

300

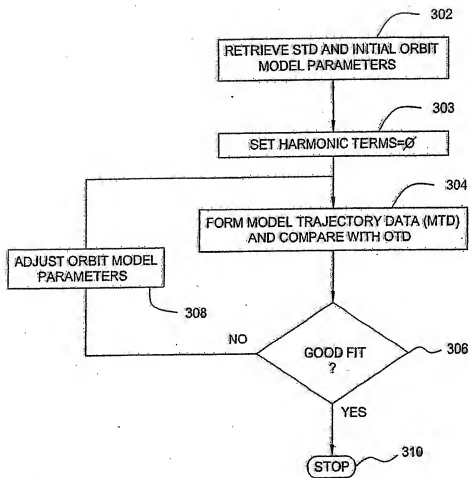


FIG. 3

SUBSTITUTE SHEET (RULE 26)




FIG. 4